


Overwrapping machine
mod. SW8A3 "Smart Wrap"

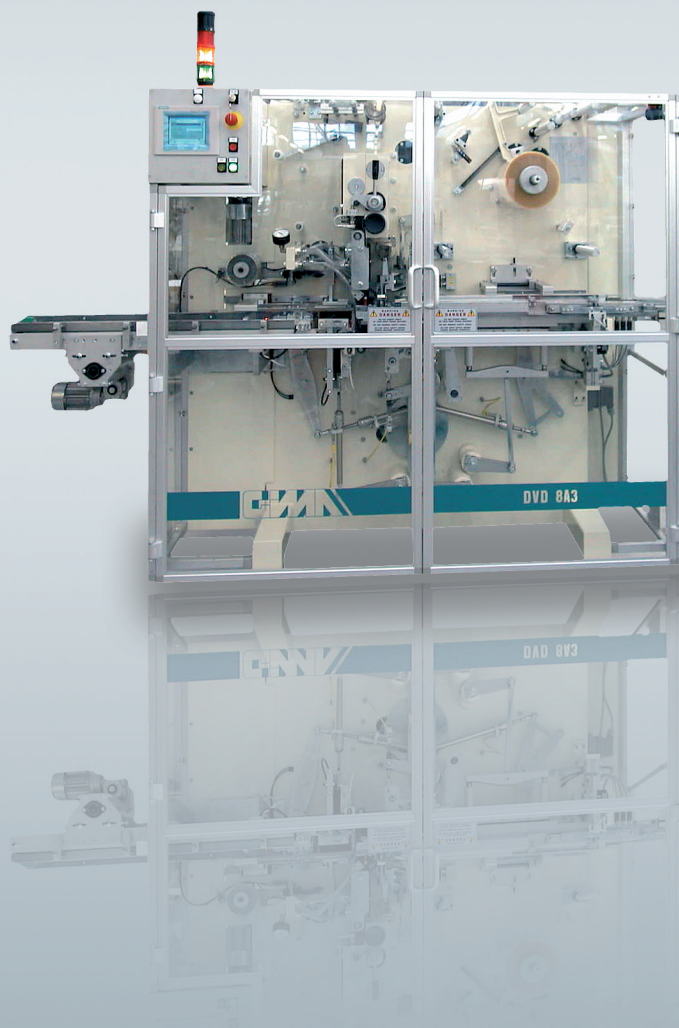

SW8A3 "Smart Wrap"

Features of the basic machine




Speed: 85 ppm
Servo driven film unwinding
Servo driven film cutting
By pass system

Product range

	a	b	c
min.	90	5.2	90
max	142	28	192




Optional units

- Tear tape applicator
- Print registration unit
- Size change set
- Print registration unit
- Manual splicing unit for easy film reel change
- Stacking and collecting table
- Green point applicator

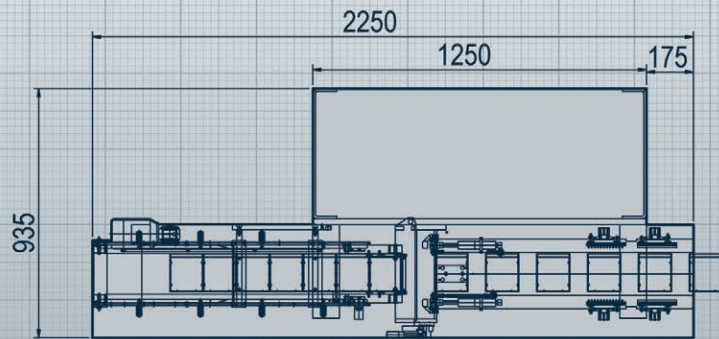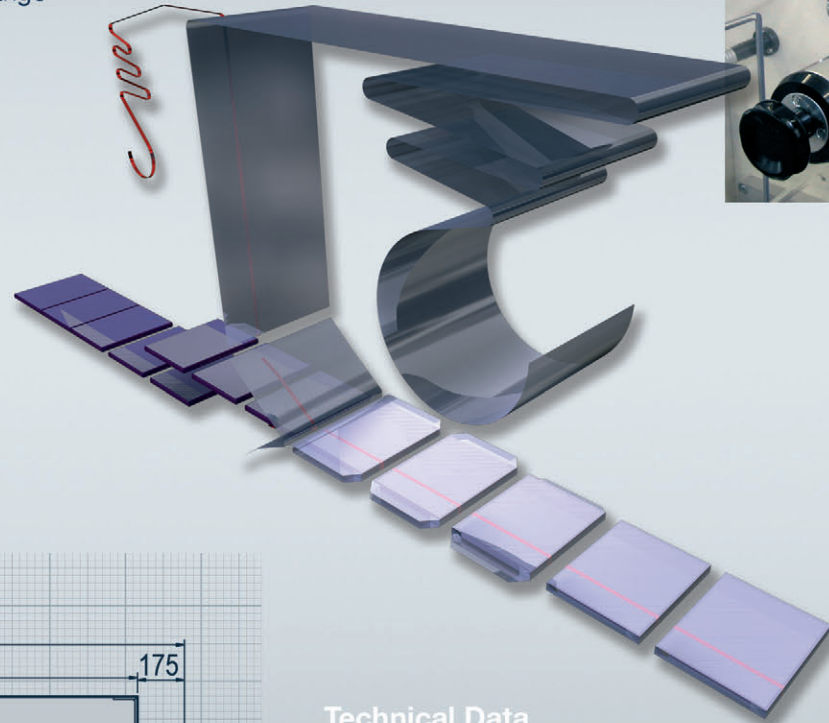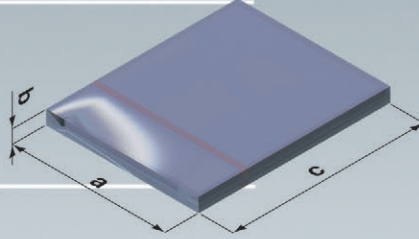

Technical Data

Power supply 220 V	18.7 A
Power supply 400 V	10.3 A
Max. power absorption	7.4 kVA
Operating pressure	6 bar
Max. air consumption	100 NI/min
Weight	1800 kg

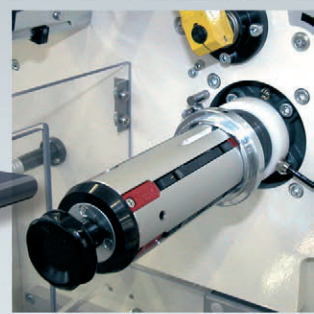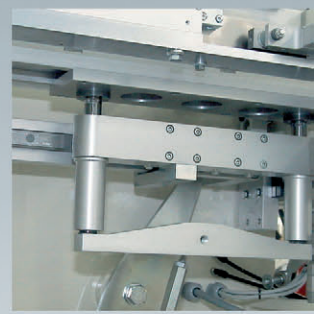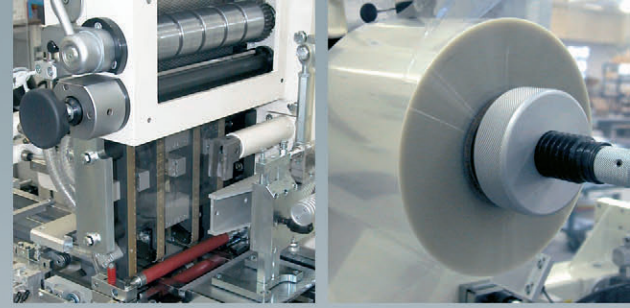

Headquarters
Gima spa - via Kennedy 17
40069 Zola Predosa - Bologna-Italy
Tel. +39 051 6169711 - Fax +39 051 752378
info@gima.com - www.gima.com